



Time for Smart Air Conditioning

The tado° Smart AC Control connects your smartphone to your air conditioner or heat pump. Using your phone's location, it automatically pre-cools before somebody gets home and turns off when everybody has left. You can also manually control your AC from wherever you are with the mobile app on your smartphone or tablet.



Control from anywhere

Turn the AC on and off or change the settings in the app from anywhere, at any time.



Geofencing

Uses your phone's location to automatically adjust the AC, cooling down before you get home and turning off when you are away.



Energy savings

Save up to 40% on your AC energy costs.



Insightful reports

Get instant access to reports showing temperature and cooling activity, as well as your expected savings.



Smart Schedule

Set personalised schedules with different temperatures at various times of the day to suit your needs.



Multiple devices

Control multiple rooms from one app.



Wi-Fi Connection

Connects to the cloud via your home Wi-Fi.




Variable position

On the wall or on a surface.

Setup

The Smart AC Control controls the AC via infrared signals and connects to your home Wi-Fi. It can be mounted on the wall or placed on a surface.

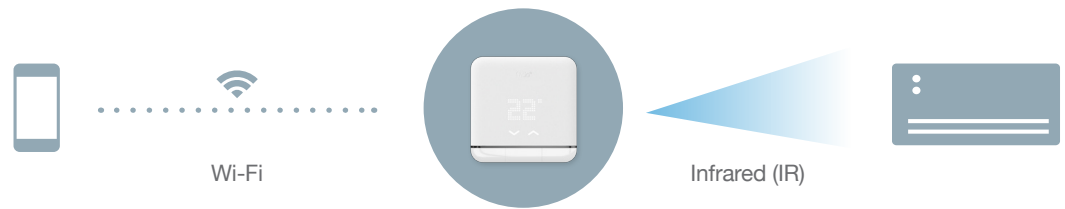

Compatibility

The Smart AC Control works with all air conditioners with a remote control that displays the air conditioner's current settings (for example mode, target temperature and fan speed).



Smart AC Control



Inside the box

- tado° Smart AC Control
- Adhesive strips
- Power adapter
- USB cable



Packaging:

Dimensions (H x W x D) 167 x 167 x 75 mm / 6.57 x 6.57 x 2.95 inches
Weight 700g

EAN/UPC:

IT 4260328610305
ES 4260328610299

FR 4260328610282
Benelux 4260328610350

DE 4260328610312
US 814979020002

All other countries
4260328610268

Specifications

Power supply: AC 120/240V, 5V USB power supply,
Cable length 1850 mm / 72.83 inches

Interface: LED matrix 10 x 19 LEDs, 32 x 20 mm / 1.25 x 0.78 inches / Capacitive touch surface

Sensors: temperature / humidity / ambient light

Dimensions (H x W x D): 100 x 100 x 14.5 mm / 3.94 x 3.94 x 0.57 inches

Weight: 74g / 0.163 lbs

Certifications: German engineered, production certified:
ISO 14001 / ISO 9001 / BS OHSAS 18001 / RoHS, recyclable packaging

Warranty: 2 year limited warranty

Wireless connectivity: via the local Wi-Fi network with any 802.11 b/g/n, 2.4GHz router

Data encryption: TLS 1.2 (SSL), 2048-bit Extended Validation Certificate

Product material and finish: PC + ABS plastic, PC plastic, PE plastic / front: white, matt /glossy IR window Strip gloss black, rear: light gray rubberized

Languages: English, German, French, Italian, Spanish, Dutch

App

- For iOS 9, Android 4.0.3, Windows 10 or above
- Free download and app updates



Integration

The Smart AC Control can also be connected to other devices and services. Control your AC with your voice, using Amazon Alexa, or bring products and web services together to create new scenarios with IFTTT.



Designed in Munich. Assembled in the EU.

www.tado.com, tado GmbH, Munich